

# XTV 12750

12 75


XTV 12750 -



: 12 ( -20° +50° ).  
400 -  
100%

-	6
	12
	75 A 20- U - 1.75 / 25°
	29.5
	800A (5 )
	6.5
	: -20° +50° ; : -20° +50° ; : -20° +50°
	25°
	13.5 - 13.8 25°
	22.5 A ( ), I <sub>max</sub>
	14.4 - 15.0 25°
	6 25° , *
	6

\*

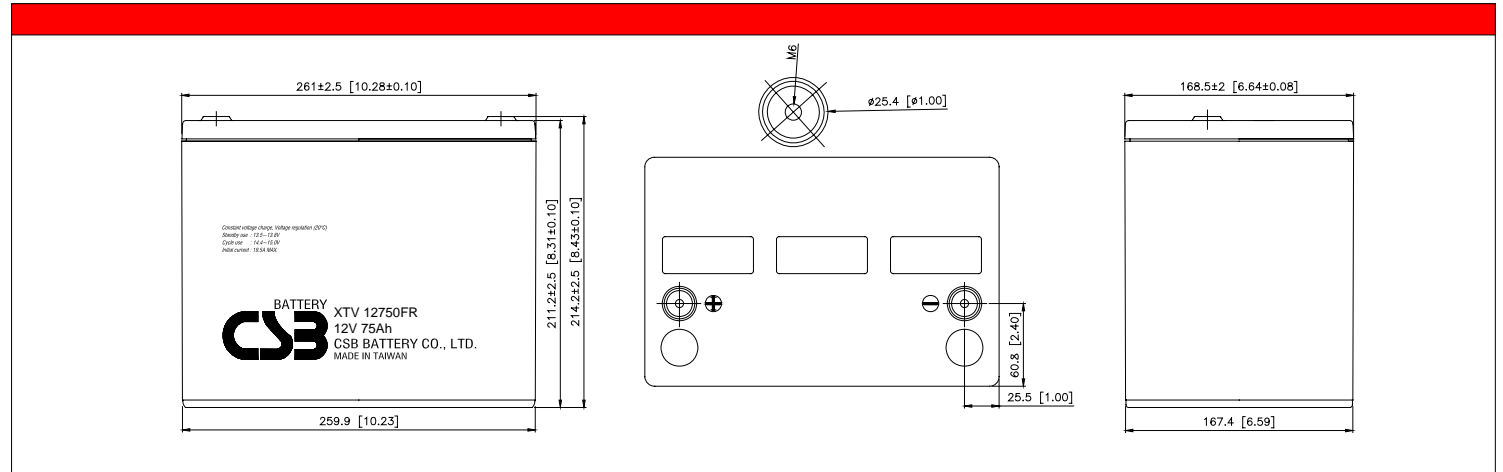

: A ( 25° )										
U <sub>k</sub> /T	15	30	1	2	3	4	5	8	10	20
1.60 /	147	90.9	52.6	29.9	21.8	17.1	14.0	9.27	7.62	4.13
1.67 /	143	89.1	52.3	29.8	21.7	17.0	13.9	9.18	7.50	4.00
1.70 /	141	88.3	51.9	29.5	21.6	16.9	13.8	9.09	7.42	3.92
1.75 /	134	86.3	51.4	29.3	21.4	16.8	13.7	9.00	7.33	3.80
1.80 /	124	82.5	50.2	28.8	20.8	16.3	13.4	8.83	7.30	3.76
1.85 /	111.0	77.3	47.7	27.5	19.9	15.6	12.8	8.53	7.11	3.64

: / ( 25° )										
U <sub>k</sub> /T	15	30	1	2	3	4	5	8	10	20
1.60 /	1625	1025	602	344	252	198	163	108.0	87.8	45.8
1.67 /	1591	1012	598	343	251	197	162	107.0	87.0	45.4
1.70 /	1569	1000	594	340	249	196	161	106.0	86.3	45.0
1.75 /	1497	978	588	337	248	194	159	105.0	85.5	44.7
1.80 /	1375	933	574	332	242	189	156	102.0	84.8	44.2
1.85 /	1228	874	544	317	230	180	148	98.8	81.8	42.5