


## Лампа T10 UL LED TUBE Day White 8W




### Dimension:

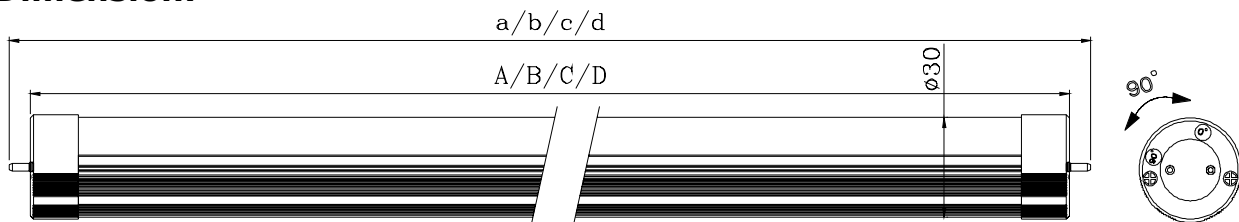

0.6M	A=0.59M	a=0.604M
0.9M	B=0.89M	b=0.91M
1.2M	C=1.2M	c=1.214M
1.5M	D=1.5M	d=1.514M

Range of tolerance: ±0.25mm

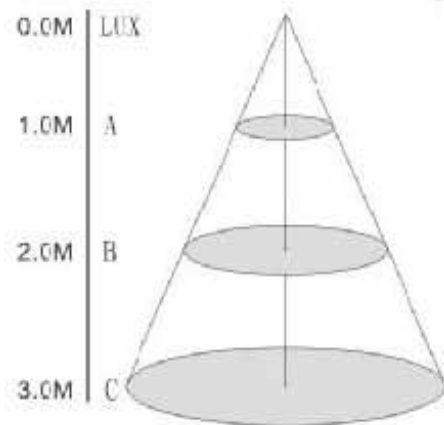

### Parameter

Dimension (mm) L*W*H	0.6M	0.9M	1.2M	1.5M
Main material	cover PC fixture AL			
Average power consumption (W)	8	12	16	20
Input voltage (V)	AC110-277V			
LED quantity (Pc)	120	180	240	304
LED type	SMD			
Color	White /Day White/Warm White			
Luminous flux (Lm)	W/DW (530±15%) WW (505±15%)	W/DW (790±15%) WW (750±15%)	W/DW (1100±15%) WW (1060±15%)	W/DW (1450±15%) WW (1370±15%)
Color temperature (K)	6000-7000K (White) / 4000-5000K (Day White) / 3000-4000K (Warm White)			
illumination intensity (LUX)	A ( 130±10% )	A ( 180±10% )	A ( 220±10% )	A ( 300±10% )
	B ( 45±10% )	B ( 63±10% )	B ( 80±10% )	B ( 107±10% )
	C ( 27 ±10% )	C ( 36±10% )	C ( 45±10% )	C ( 60±10% )
Rendering index	72			
Net Weight (kg)	0.22±10%	0.34±10%	0.44±10%	0.52±10%
Package Size (mm)	655*190*275mm 1/24	960*190*275mm 1/24	1265*190*275mm 1/24	1565*190*275mm 1/24
Life expectancy (h)	50000-80000			

## **Usage**

- Operating voltage: AC110-277V 50/60Hz
- Working environment: -20°C to 40°C
- Suitability: for indoor application only.

## **Quality Warranty**

- Quality guarantee is based on storing, installing, operating and maintaining correctly in the normal operation condition.
- It is not included in our maintaining range when installing inappropriately, breaking the operating rules, and leading to the products damaging.
- Our company will maintain the right to either repair, parts replacing, or products exchange during the quality warranty period.

## **Safety Note**

- Please do not hit or press it with heavy substance.
- Please Handle and transport gently
- Please do not touch and twist the tube when power is on.
- Light warm is normal when power is on.