


# Standard Series FP1225 12V2.5Ah

**FirstPower®**

## Dimension

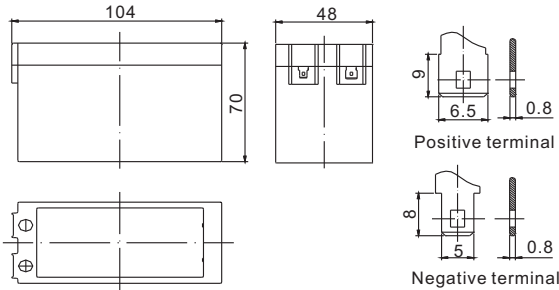

**+T2/-T1**  
Terminal




## Specification

Nominal Voltage		12 V
Capacity(20HR, 25°C)		2.5 Ah
Dimension	Length	104mm (4.09inch)
	Width	48mm (1.89inch)
	Height	70mm (2.76inch)
	Total Height	70mm (2.76inch)
Approx. Weight		0.92kg (2.03lbs)


## Characteristics

Capacity 20°C (68°F) To 1.70V/Cell	20 hour rate	2.5Ah
	10 hour rate	2.3Ah
	5 hour rate	2.15Ah
	1 hour rate	1.56Ah
	15 min rate	1.14Ah
Internal resistance(Fully charged, 25°C)		Approx. 47m Ω
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ±3°C(77°F ±5°F)
Operating temperature range		-15°C~50°C(5°F~122°F)
Float charging voltage(25°C)		13.60 to 13.80V
Cyclic charging voltage(25°C)		14.50 to 14.90V
Maximum charging current		0.75A
Terminal material		Copper
Maximum discharge current		37.5A(5 Sec.)


## The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

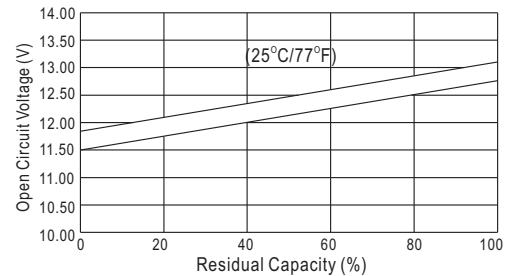

## Charging Characteristics(25°C)

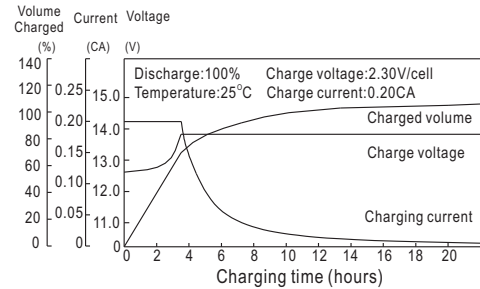

## Cycle Life(25°C)

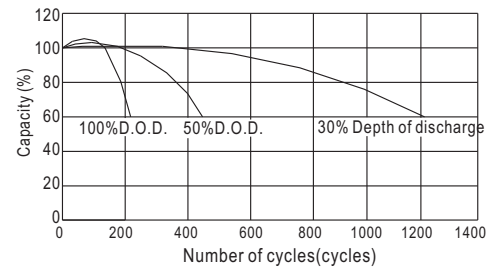

## Constant Current Discharge Characteristics (A, 25°C)

F.V/TIME	5min	10min	15min	30min	60min	3h	5h	10h	20h
9.60V	9.50	6.00	4.75	2.75	1.63	0.63	0.43	0.23	0.13
10.2V	9.03	5.70	4.56	2.64	1.56	0.63	0.43	0.23	0.13
10.8V	8.48	5.36	4.33	2.51	1.48	0.61	0.42	0.23	0.13

## Constant Power Discharge Characteristics (Watt, 25°C)

	5min	10min	15min	30min	60min	3h	5h	10h	20h
	106	67.7	54.2	31.5	18.8	7.54	5.15	2.80	1.52
	101	64.3	52.0	30.3	18.1	7.43	5.07	2.78	1.51
	94.7	60.4	49.4	28.7	17.2	7.28	4.97	2.78	1.50