




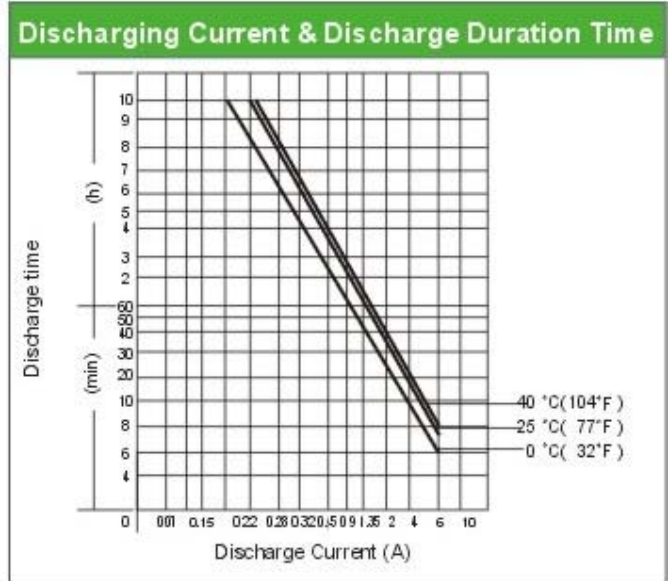

DJW6-2.0(6V2.0AH)

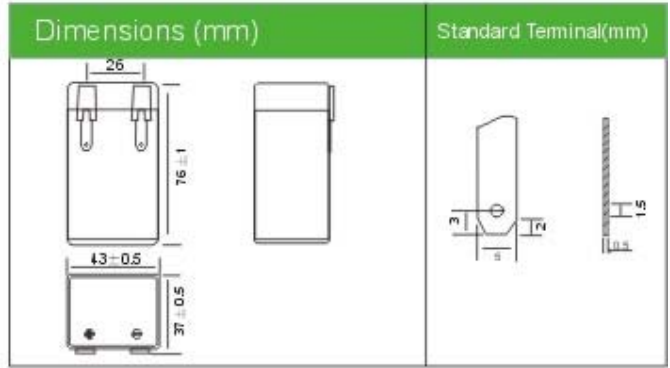

Physical Specification		
Nominal Voltage		6V
Nominal Capacity (20HR)		2.0AH
Dimension	Length	43±1 mm (1.69 inches)
	Width	37±1 mm (1.45 inches)
	Container Height	76±1 mm (2.99 inches)
	Total Height (with Terminal)	76±1 mm (2.99 inches)
Weight		Approx 0.34kg (0.76lbs)
Standard Terminal		/

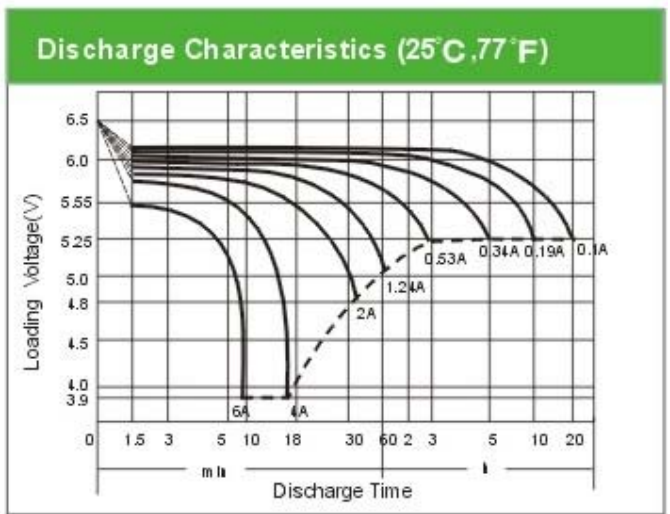

Electrical Specification					
Rated Capacity	20 hour rate (0.1 A)	2.0AH	Constant Voltage	Cycle	Initial Charging Current less than 1.35A. Voltage 7.20V-7.60V at 25°C (77°F) Temp. Coefficient -15mV/C
	10 hour rate (0.19 A)	1.9AH			
	5 hour rate (0.34 A)	1.7AH			
	1 hour rate (1.24 A)	1.24AH			
	15 minute rate (3.92A)	0.98AH			
Capacity affected by Temperature	40°C (104°F)	103%	Charge	Standby	No limit on Initial Charging Current Voltage 6.75V-6.90V at 25°C(77°F) Temp. Coefficient -10mV/C
	25°C (77°F)	100%			
	0°C (32°F)	86%			

Constant Current (Amp) and Constant Power (Watt) Discharge Table (25°C, 77°F)

Time(minute) Final voltage/Cell	5	10	15	20	30	45	60	120	180	300	600	1200
Amp/Watt/Cell	1.3	1.3	1.3	1.3	1.6	1.6	1.67	1.7	1.75	1.75	1.75	1.8
A	8.00	5.70	3.92	3.20	2.30	1.60	1.24	0.70	0.53	0.34	0.19	0.10
W	14.32	10.72	7.46	6.26	4.52	3.18	2.46	1.39	1.01	0.68	0.37	0.20