

# Maintenance-Free Rechargeable Sealed Lead-Acid Battery



## HR1234W

(34W/Cell 15Min Rate)


For High Rate Discharge

The battery is constructed by plates, separators, safety valves and container. Since the electrolyte is held by a glass-mat separator and plates, the battery can use in any direction and position without leakage.

### PERFORMANCE SPECIFICATIONS


<b>Nominal Voltage(V)</b> .....	12 volts(6cells in series)
<b>Nominal Capacity(AH)</b>	
10 Hour rate F.V.(1.75V/cell) (700mA to10.50volts) .....	7.0A.H.
15 Min rate F.V.(1.30V/cell) (204W to 7.80volts) .....	4.25A.H.
<b>Approximate Weight</b> .....	2600g(5.73lbs.)
<b>Terminal</b>	
Standard.....	Type T2
Optional.....	Type T1
<b>Internal Resistance (Fully Charged Battery)</b> .....	<20mΩ
<b>Maximum Discharge Current For 5 sec.(A)</b> .....	105A
<b>Maximum Charge Current(A)</b> .....	2.1A
<b>Ambient Temperature</b>	
Charge.....	0°C(32°F)~40°C(104°F)
Discharge.....	-20°C(-4°F)~50°C(122°F)
Storage.....	-20°C(-4°F)~40°C(104°F)
<b>Vibration test:</b>	
Frequency: 16.7HZ	
Amplitude: 4mm	
Vibrate the battery horizontally or vertically for 60 minutes. The battery have no abnormality.	
<b>Case</b> .....	ABS
<b>Dimension(mm/inch)</b>	
Length           ±1.5mm.....	151/5.94
Width           ±1.5mm.....	65/2.56
Container Height ±1.5mm.....	94/3.70
Total Height   ±2mm.....	100/3.94
<b>Application</b> .....	UPS, Laboratory Equipment, Toy-Cars, Power Packs, Fishing Lights.

## HR1234W Battery discharge characteristics (25°C/77°F)

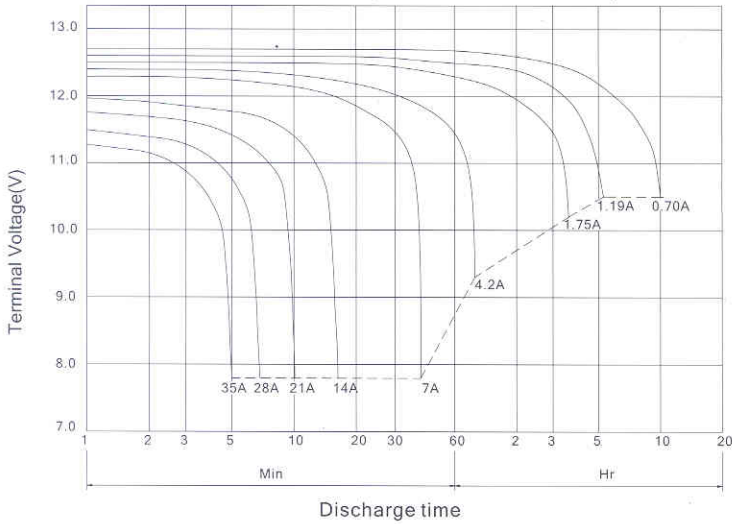

## Battery Charging Characteristics

(Typical example of the charge characteristic for the standby use)

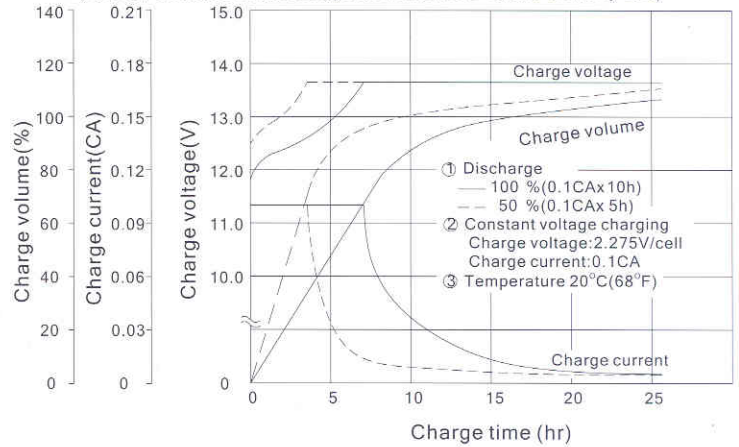


## Charging Procedure

Application	Charging method	Charging Voltage at 20°C (V/cell)	Temperature compensation coefficient of charging voltage (mV/°C/cell)	Max. charging current (CA)	Charging time 0.1CA, 20°C (h)		Temp (°C)
					100% discharge	50% discharge	
For standby power source	Constant voltage & Constant current charging (with current restriction)	2.25~2.30	-3	0.3	24	20	0~40 (32~104°F)
For cycle service		2.40~2.50	-4	0.3	16	10	


\*Temperature compensation of charging voltage is not needed, when using the batteries within 5°C to 35°C range.

## Effect of Temperature on Long Term Float Life

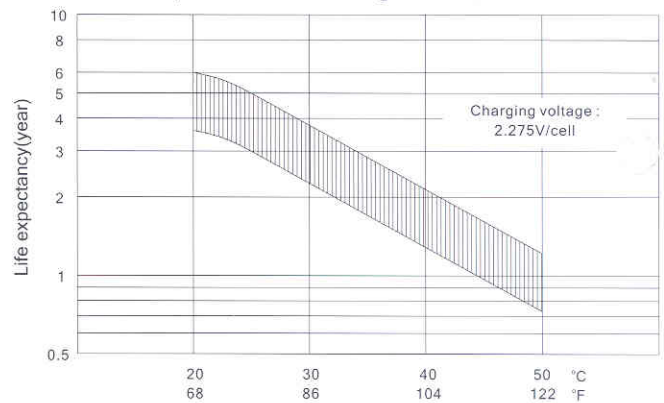


## OUTER DIMENSIONS

mm(inch)

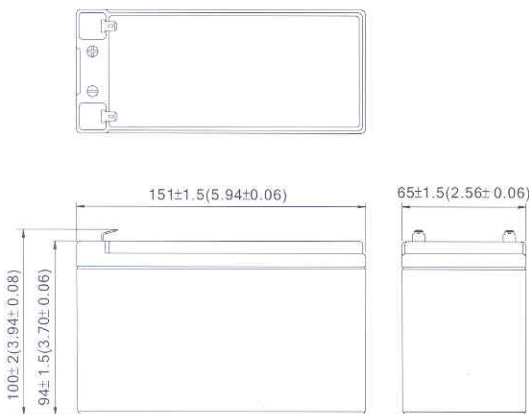

## TERMINAL TYPE


mm(inch)

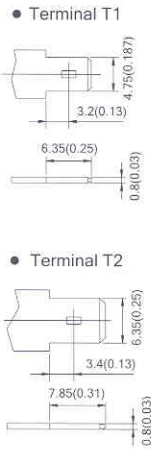

## Constant power discharge characteristics at 25°C/77°F

Final Voltage	Discharge time							
	5Min	10Min	15Min	20Min	30Min	40Min	50Min	60Min
10.80V	328.0	224.0	172.3	138.4	105.2	80.0	66.8	58.8
10.20V	392.0	250.0	187.4	146.6	109.6	83.0	69.0	60.2
9.60V	420.0	263.0	195.9	152.0	112.0	85.0	70.4	61.2
9.00V	432.0	268.0	200.2	154.4	113.4	86.0	71.2	61.8
8.40V	440.0	271.6	202.5	155.8	114.2	86.6	71.8	62.2
7.80V	444.0	274.0	204.0	156.8	114.8	87.0	72.2	62.4

## TERMINAL POSITION



**B.B. BATTERY CO., LTD.**

Web Site: <http://www.bb-battery.com>

### USA:

B&B BATTERY(USA) INC.  
6415 RANDOLPH ST.COMMERCE,  
CA,90040 U.S.A.  
TEL:1-323-278-1900,1-800-278-8599  
FAX:1-323-278-1268  
E-Mail:sales@bb-battery.com

### EUROPE:

B&B BATTERY(EUROPE) B.V.  
3 WIJNGAARDVELD, 9300 AALST,BELGIUM  
TEL:(00)32-53781567  
FAX:(00)32-53781567  
E-Mail:hansdevriese@bb-battery.com

### CHINA FACTORY:

B.B. BATTERY CO., LTD.  
CHENG DONG TRIAL AREA,HUANG GANG,  
RAOPING, GUANG DONG,CHINA,515700  
TEL:86-768-7601001-2  
FAX:86-768-7601469  
E-Mail:maggy@bb-battery.com

### HONG KONG:

NATIONAL TRADING LTD.  
TEL:852-2301-3800  
FAX:852-2739-1182  
E-Mail:bbhk@hkstar.com

### JAPAN:

B&B BATTERY(JAPAN) CO., LTD.  
1375-11 NARAHARA-MACHI,HACHIOJI,  
TOKYO 193-0803,JAPAN.  
TEL:81-426-256-537  
FAX:81-426-256-537  
E-Mail:miyata@bb-battery.com

### TAIWAN:

B.B. BATTERY(TAIWAN) CO., LTD.  
TEL:886-6-502-5150  
FAX:886-6-589-8087  
E-Mail:maggy@bb-battery.com

