






DJW12-10(12V10.5AH)

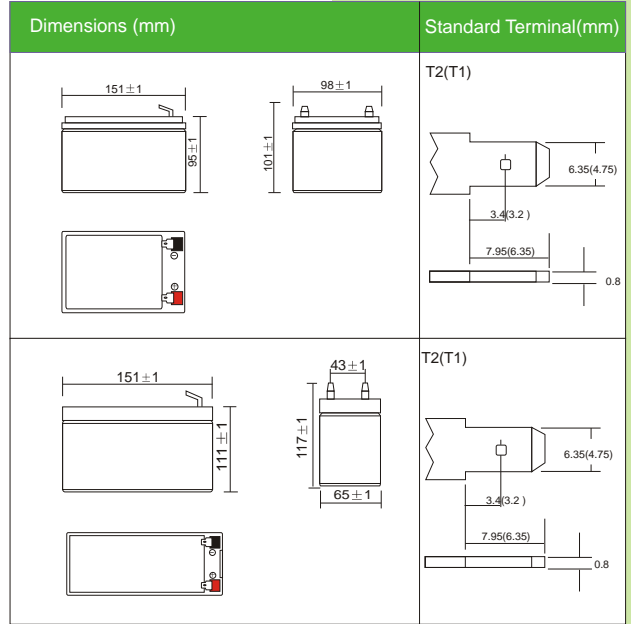

Physical Specification		
Nominal Voltage		12V
Nominal Capacity (20HR)		10.5AH
Dimension	Length	151 ± 1mm (5.95 inches)
	Width	98 ± 1mm (3.86 inches)
	Container Height	95 ± 1mm (3.74 inches)
	Total Height (with Terminal)	101 ± 1mm (3.98 inches)
Weight		Approx 3.55kg (7.83lbs)
Standard Terminal		T2/T1 (standard)

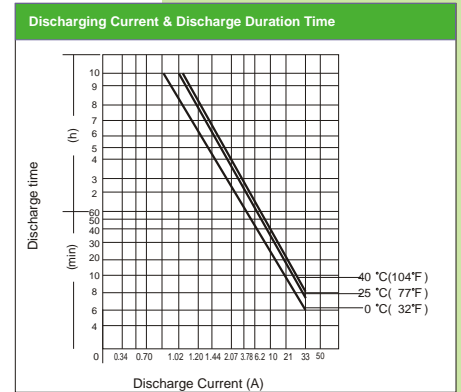

Electrical Specification					
Rated Capacity	20 hour rate (0.525 A)	10.5AH	Constant-Voltage Charge	Cycle	Initial Charging Current less than 3.0A. Voltage 14.4V~ 15.0V at 25°C (77°F) Temp. Coefficient -30mV/C
	10 hour rate (0.98 A)	9.8AH			
	5 hour rate (1.87 A)	9.35AH			
	1 hour rate (6.82 A)	6.82AH			
Capacity affected by Temperature	15minute rate (21.56 A)	4.3AH	Standby	No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C (77°F) Temp. Coefficient -20mV/C	
	40C (104F)	103%			
	25C (77F)	100%			
	0C (32F)	86%			

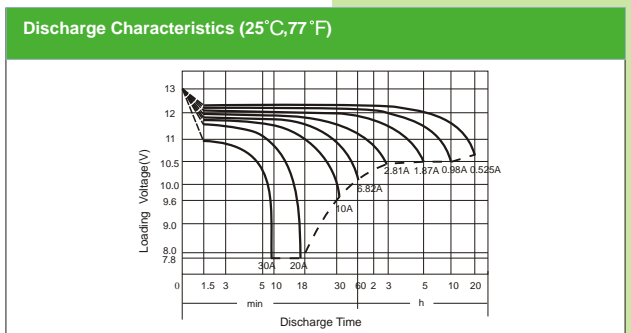

Constant Current (Amp) and Constant Power (Watt) Discharge Table (25°C, 77°F)														
Amp/Watt/Cell	Time(minute)	Final voltage/Cell	5	10	15	20	30	45	60	120	180	300	600	1200
			1.3	1.3	1.3	1.3	1.6	1.6	1.67	1.7	1.75	1.75	1.75	1.8
A			41.00	31.35	21.56	17.60	12.65	8.80	6.82	3.85	2.81	1.87	0.98	0.525
W			78.76	58.96	41.03	34.43	24.86	17.49	13.53	7.66	5.58	3.74	1.96	1.11