

Specification

Nominal Voltage	2V	
Nominal Capacity(20HR)	128.0AH	
Dimension	Length	170±2mm (6.69 inches)
	Width	98±2mm (3.86 inches)
	Container Height	205±2mm (8.07 inches)
	Total Height (with Terminal)	212±2mm (8.35 inches)
Approx Weight	Approx 8.0 kg (17.64lbs)	
Terminal	T7	
Container Material	ABS	
Rated Capacity	128.0 AH/6.40A	(20hr, 1.80V/cell, 25°C/77°F)
	120.0 AH/12.0A	(10hr, 1.75V/cell, 25°C/77°F)
	103.2 AH/20.64A	(5hr, 1.75V/cell, 25°C/77°F)
	89.7 AH/29.9A	(3hr, 1.75V/cell, 25°C/77°F)
	70.4 AH/70.4A	(1hr, 1.67V/cell, 25°C/77°F)
Max. Discharge Current	910A (5s)	
Internal Resistance	Approx 1.35mΩ	
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 32.5A. Voltage	
	2.4V~2.5V at 25°C(77°F)Temp. Coefficient -5mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	2.25V~2.3V at 25°C(77°F)Temp. Coefficient -3mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	Leoch LPG series batteries may be stored for up to 9 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Applications

- ◆ Telecommunications
- ◆ Solar system
- ◆ Wind power system
- ◆ Engine starting
- ◆ Wheelchair
- ◆ Floor cleaning machines
- ◆ Golf trolley
- ◆ Boats



Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	104.4	82.1	62.6	54.4	34.7	26.4	21.9	18.91	16.32	14.45	13.04	11.91	11.27	6.14
1.80V/cell	119.9	91.7	69.1	60.0	37.6	28.3	23.2	19.87	17.14	15.12	13.67	12.53	11.77	6.40
1.75V/cell	134.6	100.8	74.6	64.1	39.8	29.9	24.3	20.64	17.74	15.67	14.10	12.91	12.00	6.53
1.70V/cell	145.1	108.0	79.2	67.9	42.2	31.2	25.1	21.26	18.36	16.18	14.52	13.24	12.29	6.62
1.67V/cell	150.8	112.3	82.1	70.4	43.3	32.2	25.7	21.72	18.66	16.42	14.73	13.43	12.43	6.68
1.60V/cell	163.4	120.0	88.2	74.8	45.0	33.4	26.7	22.39	19.12	16.77	15.00	13.71	12.67	6.77





Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	198.3	156.9	120.4	105.0	67.2	51.4	42.7	37.0	32.1	28.5	25.7	23.5	22.3	12.2
1.80V/cell	224.7	173.6	131.7	115.3	72.5	54.9	45.1	38.8	33.6	29.7	26.9	24.7	23.2	12.7
1.75V/cell	249.5	188.8	140.8	122.5	76.5	57.8	47.2	40.1	34.6	30.7	27.7	25.4	23.7	12.9
1.70V/cell	265.9	200.9	149.1	129.4	80.8	60.0	48.5	41.2	35.8	31.7	28.5	26.1	24.2	13.1
1.67V/cell	273.3	206.1	153.1	133.1	82.4	61.7	49.6	42.0	36.3	32.0	28.8	26.4	24.5	13.2
1.60V/cell	292.9	218.8	163.5	140.5	85.3	63.9	51.3	43.1	37.0	32.6	29.3	26.9	24.9	13.3


Dimensions

T7 Terminal


Unit: mm [inches]




Discharge Characteristics

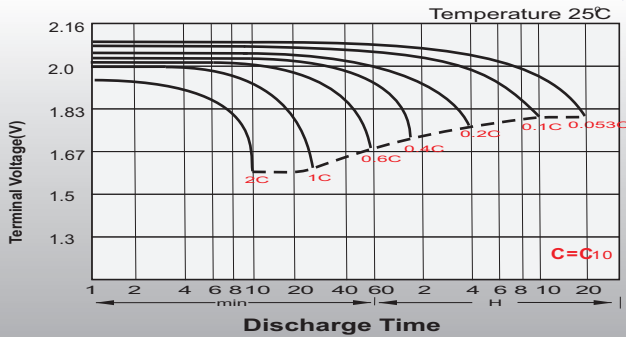


Float Charging Characteristics

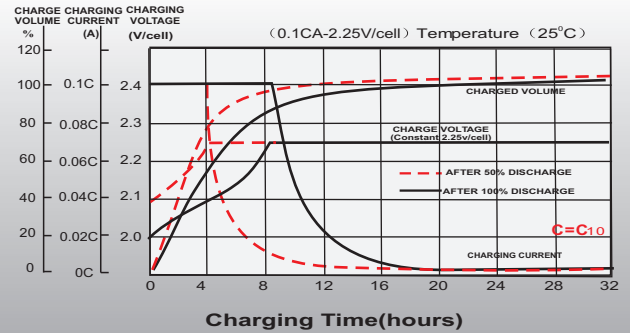


Temperature Effects in Relation to Battery Capacity

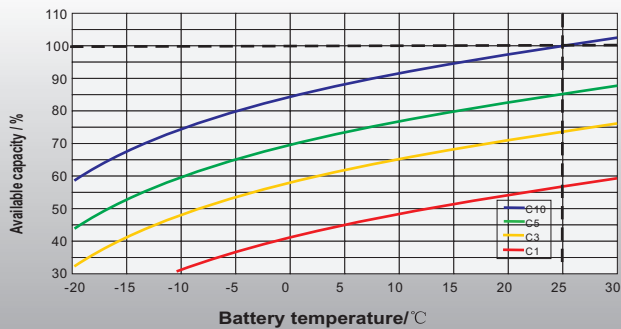


Effect of Temperature on Long Term Float Life

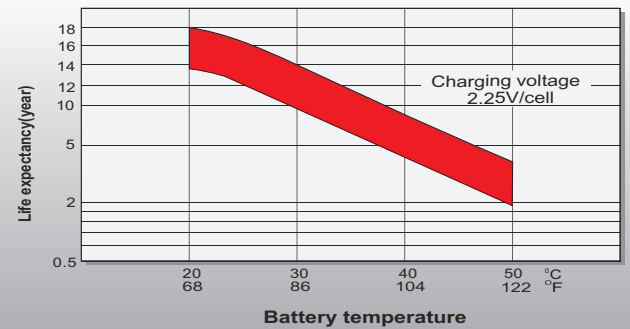

Cycle Life in Relation to Depth of Discharge

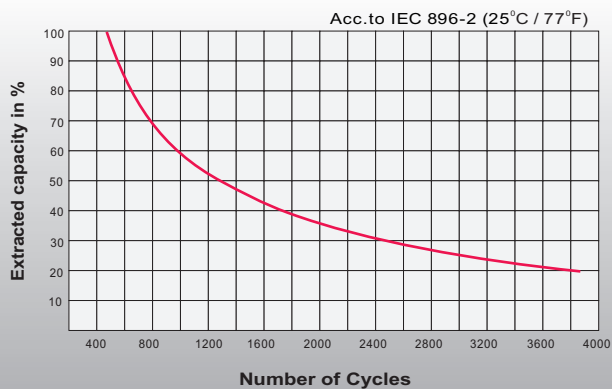

General Relation of Capacity VS. Storage Time

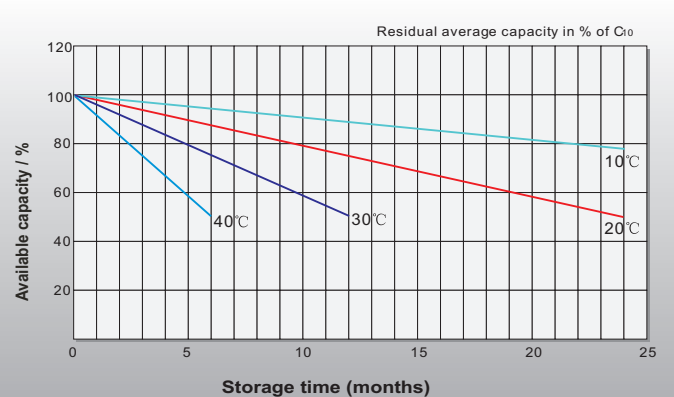

Sales Office

China sales office:

Add: 5th Floor, Xinbaohui Bldg., Nanshan, Shenzhen, China. 518052
 Tel: +86-755-86036060 (100 lines)
 Fax: +86-755-26067269
 E-mail: export@leoch.com

North America sales office:

Add: 19751 Descartes, Unit A, Foothill Ranch, CA 92610, USA
 Tel: 949-588-5853
 Fax: 949-588-5966
 E-mail: sales@leoch.com

Europe sales office:

Add: LaCampagna House, Main Road, Gloucester, GL2-8JH, United Kingdom
 Tel: +44(0) 1452 751016
 E-mail: Sales.Europe@leoch.com