

LPG SERIES-GEL Battery

LPG2-400 (2V400AH)

Specification

Nominal Voltage	2V	
Nominal Capacity(10HR)	400.0AH	
Dimension	Length	210±2mm (8.27 inches)
	Width	175±2mm (6.89 inches)
	Container Height	330±2mm (12.99 inches)
	Total Height (with Terminal)	350±2mm (13.78 inches)
Approx Weight	Approx 28.0 kg (61.74lbs)	
Terminal	T11	
Container Material	ABS	
Rated Capacity	426.7 AH/21.34A	(20hr, 1.80V/cell, 25°C/77°F)
	400.0 AH/40.00A	(10hr, 1.75V/cell, 25°C/77°F)
	344.0 AH/68.8A	(5hr, 1.75V/cell, 25°C/77°F)
	299.1 AH/99.7A	(3hr, 1.75V/cell, 25°C/77°F)
	234.7 AH/234.7A	(1hr, 1.67V/cell, 25°C/77°F)
Max. Discharge Current	2800A (5s)	
Internal Resistance	Approx 0.79mΩ	
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	0~40°C (32~104°F)
	Storage	-20~50°C (-4~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 100.0A. Voltage	
	2.4V~2.5V at 25°C(77°F)Temp. Coefficient -5mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	2.25V~2.3V at 25°C(77°F)Temp. Coefficient -3mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	Leoch LPG series batteries may be stored for up to 9 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Applications

- ◆ Telecommunications
- ◆ Solar system
- ◆ Wind power system
- ◆ Engine starting
- ◆ Wheelchair
- ◆ Floor cleaning machines
- ◆ Golf trolley
- ◆ Boats



Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	348.0	273.6	208.5	181.2	115.6	88.1	73.0	63.0	54.4	48.2	43.5	39.7	37.6	20.48
1.80V/cell	399.6	305.6	230.4	200.0	125.2	94.4	77.4	66.2	57.1	50.4	45.6	41.8	39.2	21.34
1.75V/cell	448.8	336.0	248.5	213.6	132.6	99.7	81.1	68.8	59.1	52.2	47.0	43.0	40.0	21.76
1.70V/cell	483.6	360.0	264.0	226.4	140.6	103.9	83.7	70.9	61.2	53.9	48.4	44.1	41.0	22.06
1.67V/cell	502.8	374.4	273.6	234.7	144.2	107.2	85.8	72.4	62.2	54.7	49.1	44.8	41.4	22.26
1.60V/cell	544.8	400.0	293.9	249.2	150.0	111.5	89.0	74.6	63.7	55.9	50.0	45.7	42.2	22.58





Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	660.9	523.1	401.2	350.1	224.1	171.3	142.5	123.5	107.0	94.9	85.8	78.5	74.3	40.6
1.80V/cell	748.9	578.8	439.1	384.4	241.5	182.9	150.5	129.3	111.9	99.0	89.7	82.4	77.5	42.2
1.75V/cell	831.6	629.3	469.5	408.4	255.1	192.8	157.2	133.7	115.4	102.3	92.4	84.8	78.9	43.0
1.70V/cell	886.4	669.6	496.8	431.3	269.2	200.2	161.8	137.4	119.3	105.5	95.0	86.9	80.7	43.5
1.67V/cell	911.1	687.0	510.3	443.6	274.7	205.7	165.3	139.9	120.9	106.7	96.1	87.9	81.6	43.9
1.60V/cell	976.3	729.2	545.1	468.5	284.4	212.9	171.0	143.8	123.5	108.7	97.7	89.6	83.0	44.5


Dimensions

T11 Terminal


Unit: mm [inches]




Discharge Characteristics

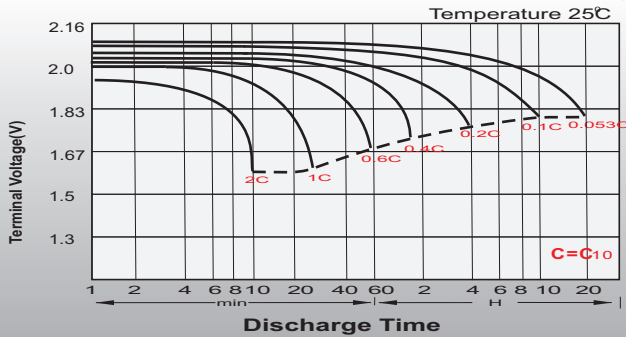


Float Charging Characteristics

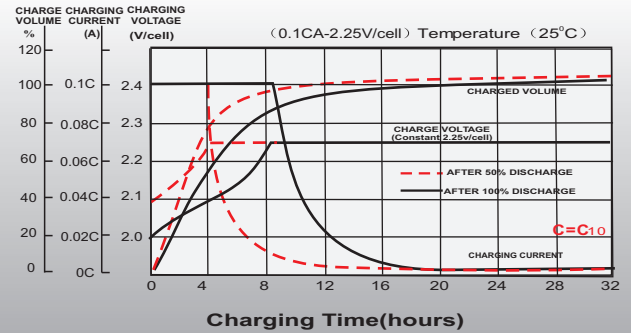


Temperature Effects in Relation to Battery Capacity

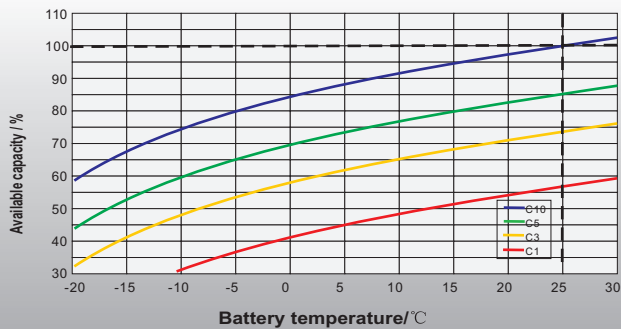


Effect of Temperature on Long Term Float Life

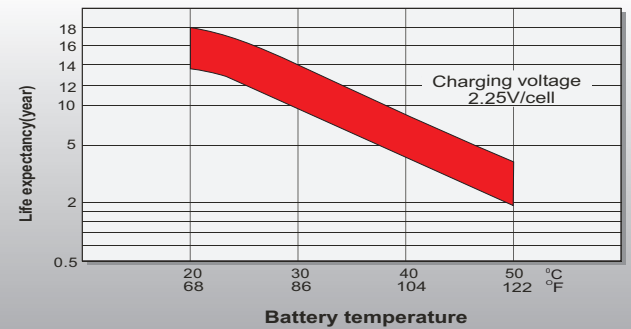

Cycle Life in Relation to Depth of Discharge

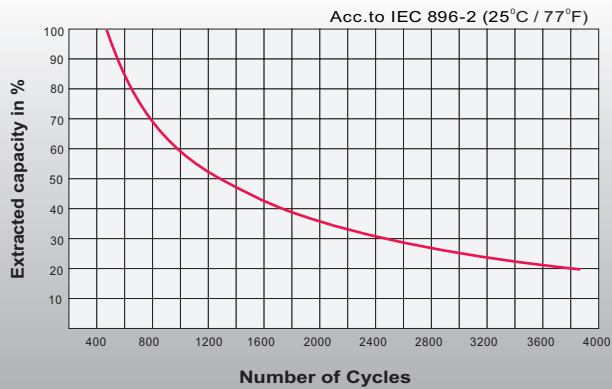

General Relation of Capacity VS. Storage Time

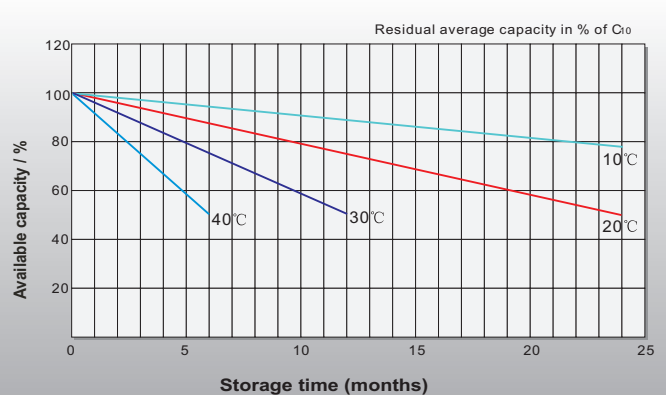

Sales Office

China sales office:

Add: 5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-755-86036060 (100 lines)
Fax: +86-755-26067269
E-mail: export@leoch.com

North America sales office:

Add: 19751 Descartes, Unit A,
Foothill Ranch, CA 92610, USA
Tel: 949-588-5853
Fax: 949-588-5966
E-mail: sales@leoch.com

Europe sales office:

Add: LaCampagna House. Main Road.
Gloucester. GL2-8JH. United Kingdom
Tel: +44(0) 1452 751016
E-mail: Sales.Europe@leoch.com