

The introduction of EON Technology™ further extends the technical leadership of PowerSafe® SBS batteries: not only do the PowerSafe SBS B14 - 190F monoblocs and SBS 410 cell retain the benefits typically associated with EnerSys® Thin Plate Pure Lead technology (long life, high energy density, superior shelf life, etc.), they now also deliver exceptional cyclic performance in both float and fast charge applications, even in the hottest and harshest operating environments.

Where conventional VRLA AGM batteries struggle to cope with harsh conditions, remote locations and frequent power outages, the combination of EON and TPPL technologies makes PowerSafe SBS 2V and 12V batteries the perfect solution for the challenging operating conditions of today's telecommunication networks.

With the introduction of the SBS 410 cell, the PowerSafe SBS EON Technology battery range is now available in two configurations: the front terminal design that allows for maximum back-up power within a given cabinet installation, and the top terminal design typically used for open rack installations.

For power, performance and reliability, there is no substitute to PowerSafe SBS EON Technology batteries.

Features & Benefits

- Capacity Range: 62 - 410Ah
- Superior cyclic performance and endurance
- High energy density
- Exceptional fast charge acceptance ability
- Long design life
- Resilient to harsh environments
- Up to two year shelf life



Construction

- Positive plates - pure lead grids manufactured using a unique process
- Negative plates - provide perfect balance with the positive plates to ensure optimum recombination efficiency
- Separators - superior quality microporous glass mat separator with high absorption and stability
- Containers and lids - UL94 V-0 rated flame retardant ABS material, highly resistant to shock and vibration
- Electrolyte - high grade dilute sulphuric acid absorbed into separator material
- Terminal design - leak resistant patented dual seal terminal design
- Self-regulating pressure relief valves - prevent ingress of atmospheric oxygen

- Flame arrestors - built into each bloc for increased operational safety

Installation and Operation

- PowerSafe® SBS batteries are designed for use in cabinets or on stands, close to the point of use. A separate battery room is not required
- PowerSafe SBS EON Technology™ models can be mounted in any orientation except inverted
- Designed for operation in traditional float applications or cyclic/hybrid applications
- Up to two year shelf life
- Low maintenance: no water addition required
- Wide operating temperature range: -40°C to + 50°C

Standards

- Designed to be compliant with international standard IEC 60896/21 & 22
- Classified as "Long Life" according to Eurobat guide 1999
- Conforms to Telcordia SR-4228
- Recognised by UL (UL Standard 1989)
- Approved as non-hazardous cargo for ground, sea and air transportation in accordance with US DOT Regulation 49 and ICAO & IATA Packing Instruction 806
- Manufactured in EnerSys® ISO 9001:2000 and ISO 14001:2004 registered production facilities


General Specifications

Type	Nominal Voltage (V)	Nominal Capacity (Ah)		Nominal Dimensions						Typical Weight		Short Circuit Current (A) ⁽¹⁾	Internal Resistance (mΩ) ⁽¹⁾	Terminals
		10 hr rate to 1.80Vpc @ 20°C	8 hr rate to 1.75Vpc @ 77°F	Length		Width		Height		kg	lbs			
SBS B14	12	62	62	280	11.0	97	3.8	264	10.4	19.1	42.0	1800	7.0	M8 F
SBS B14F	12	62	62	303	11.9	97	3.8	264	10.4	19.1	42.0	1800	7.0	M6 M
SBS C11 ⁽²⁾	12	92	91	395	15.6	105	4.1	264	10.4	28.0	61.6	2300	5.5	M8 F
SBS C11F ⁽²⁾	12	92	91	417	16.4	105	4.1	256	10.1	28.0	61.6	2300	5.5	M6 M
SBS 100 ⁽²⁾	12	100	100	395	15.6	108	4.3	287	11.3	32.6	71.9	2210	5.6	M8 F
SBS 100F ⁽²⁾	12	100	100	395	15.6	108	4.3	287	11.3	32.6	71.9	2210	5.6	M6 M
SBS 170F ⁽²⁾	12	170	170	561	22.1	125	4.9	283	11.1	52.5	115.7	3400	4.0	M6 M
SBS 190F ⁽²⁾	12	190	190	561	22.1	125	4.9	316	12.4	60.0	132.3	3800	3.3	M6 M
SBS 410 ⁽²⁾	2	410	410	200	7.9	208	8.2	239	9.4	23.2	51.1	4725	1.3	M8 M

Notes:

⁽¹⁾ Figures obtained via IEC method.

⁽²⁾ With integral or rope handles.

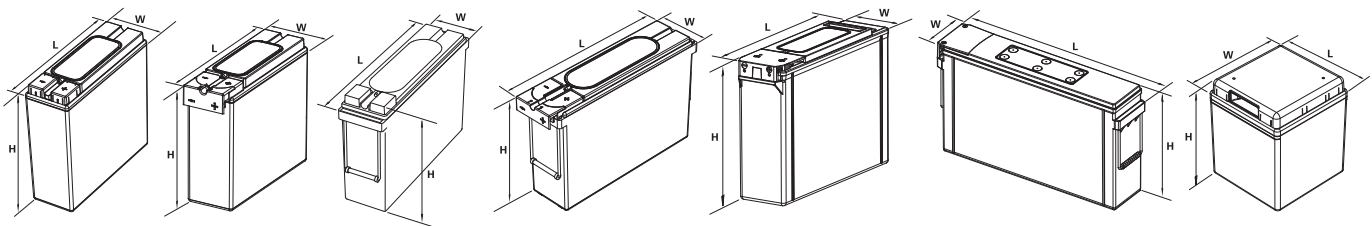

SBS B14

SBS B14F

SBS C11

SBS C11F

SBS 100 & 100F

SBS 170F & 190F

SBS 410



www.enersys-emea.com

EnerSys
P.O. Box 14145
Reading, PA 19612-4145
USA
Tel: +1-610-208-1991
+1-800-538-3627
Fax: +1-610-372-8613

EnerSys Europe
Zurich, Switzerland

EnerSys Asia
Guangdong, China
Tel: +86-755-2689 3639

EnerSys Ltd.
Rake Lane,
Clifton Junction,
Swinton, Manchester
M27 8LR, UK
Tel: +44 (0)161 794 4611
Fax: +44 (0)161 727 3809

Contact:

© 2008 EnerSys. All rights reserved.
Trademarks and logos are the property of EnerSys and its affiliates unless otherwise noted.